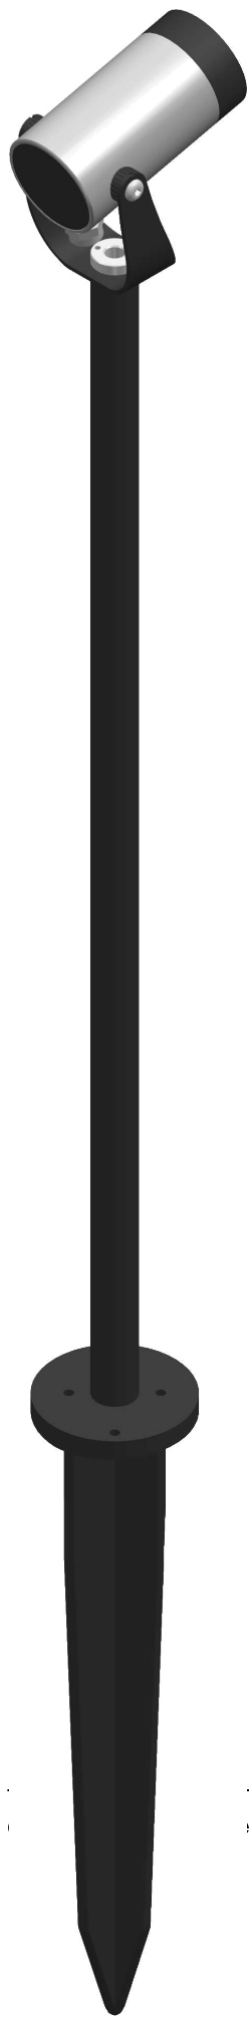


cod. 900421079**DX Stem**

Projector suitable for ground installation. Turned anodized aluminium available in two sizes $\varnothing 38$ mm heights (h.60mm, h.160mm, h.500mm) or $\varnothing 54$ (h.70mm, h.170mm, h.510mm), extremely versatile due to adjustability and low luminance. Natural aluminium, Bronze and black (for accessories only) surface anodizing treatment. Tempered silkscreened transparent glass, mechanically fixed with silicon glue, aluminium Honeycomb.

bronzo anod.

TECHNICAL DATA

Volt: 220-240
Lighting source: 6W W led
Power: 6,9W
Color temperature: 4000K
Lumen: 149
Beam: 52
Class: III
IP: IP65

SIZE

FOTOMETRIC DATA



diomede

DIOMEDE SRL
LET THERE BE LIGHT

P.IVA 10949890965
DIOMEDE 2020

VIA A. MEUCCI 5
20876 ORNAGO (MB)
ITALIA