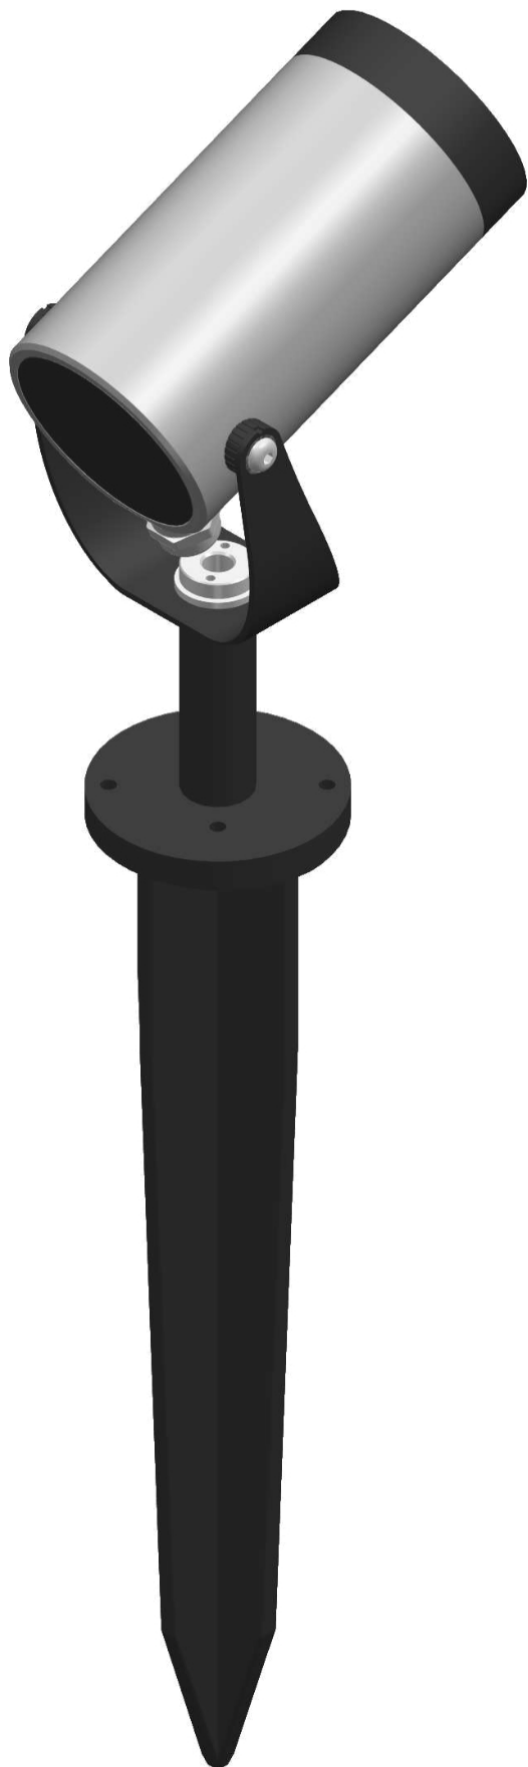


**cod. 900422146****DX Stem**

Projector suitable for ground installation. Turned anodized aluminium available in two sizes  $\varnothing 38$ mm heights (h.60mm, h.160mm, h.500mm) or  $\varnothing 54$  ( h.70mm, h.170mm, h.510mm), extremely versatile due to adjustability and low luminance. Natural aluminium, Bronze and black (for accessories only) surface anodizing treatment. Tempered silkscreened transparent glass, mechanically fixed with silicon glue, aluminium Honeycomb.

alu anod.


---

TECHNICAL DATA

SIZE

FOTOMETRIC DATA

Volt: 24  
Lighting source: 6W W led  
Power:  
Color temperature: 4000K  
Lumen: 149  
Beam: 52  
Class: III  
IP: IP65



---

**diomede**

DIOMEDE SRL  
LET THERE BE LIGHT  
  
P.IVA 10949890965  
DIOMEDE 2020

VIA A. MEUCCI 5  
20876 ORNAGO (MB)  
ITALIA