


TECHNICAL DATA

cod. 900611012

Appliques

Modulo A

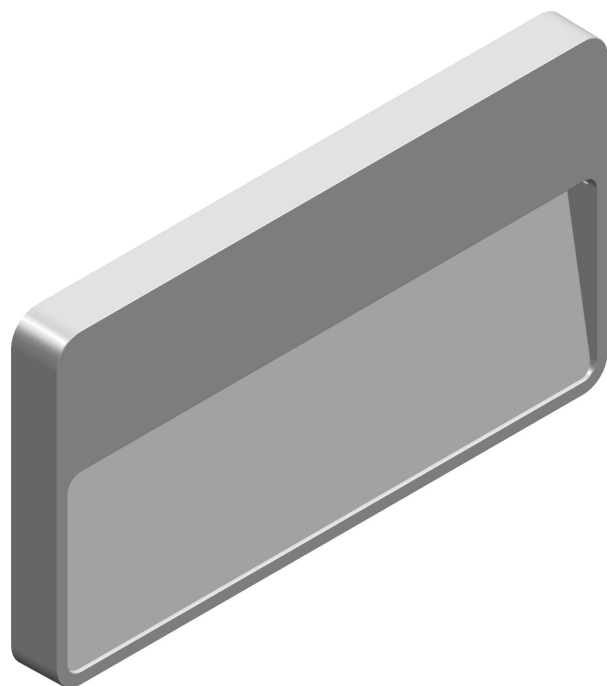


Step light for surface or recessed installation, EN47100 die-cast aluminium, square shape, Powder polyester coated on treated layer to prevent corrosion, available in four standard colours. Polished anodized aluminium, natural finishing shield reflector and connection Kit with heat shrink tubes included. Installation flush to the surface or recessed in the wall by using the installation box. UV resistant polycarbonate.

bianco

TECHNICAL DATA

Volt: 24
Lighting source: 4,6W W led
Power:
Color temperature: 3000K
Lumen: 195
Beam: diffuso
Class: III
IP: IP65

SIZE



FOTOMETRIC DATA

diomede

DIOMEDE SRL
LET THERE BE LIGHT

P.IVA 10949890965
DIOMEDE 2020

VIA A. MEUCCI 5
20876 ORNAGO (MB)
ITALIA