


cod. 900621004

Modulo A

Step light for surface or recessed installation, EN47100 die-cast aluminium, square shape, Powder polyester coated on treated layer to prevent corrosion, available in four standard colours. Polished anodized aluminium, natural finishing shield reflector and connection Kit with heat shrink tubes included. Installation flush to the surface or recessed in the wall by using the installation box. UV resistant polycarbonate.

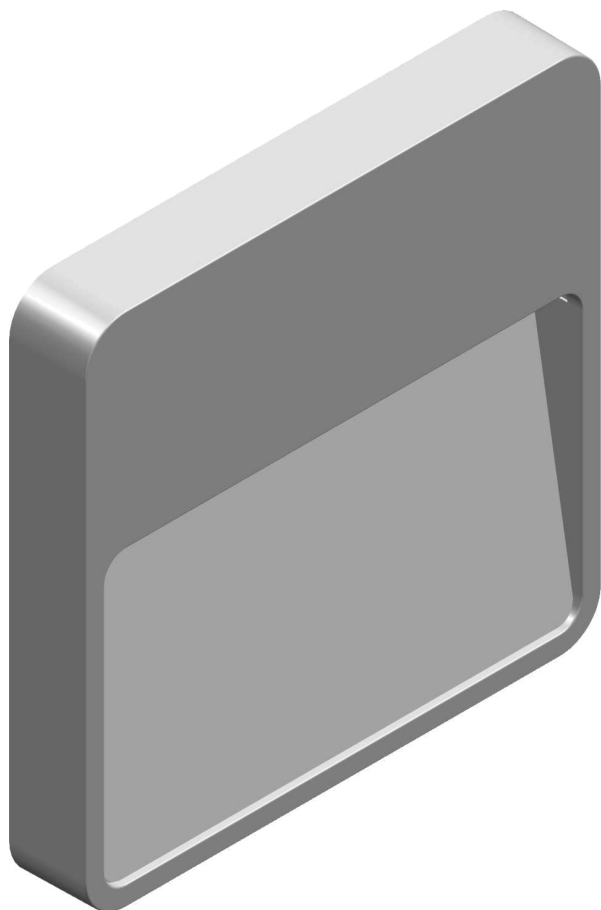


grafite

TECHNICAL DATA

Volt: 24
 Lighting source: 2,4W W led
 Power:
 Color temperature: 4000K
 Lumen: 107
 Beam: diffuso
 Class: III
 IP: IP65

SIZE



FOTOMETRIC DATA

diomede

DIOMEDE SRL
 LET THERE BE LIGHT
 P.IVA 10949890965
 DIOMEDE 2020

VIA A. MEUCCI 5
 20876 ORNAGO (MB)
 ITALIA